

Lfq-A型 系列立式自动分条机



Lfq-A Series Vertical Automatic Slitting & Rewinding Machine

用途

该机适用于BOPP、PET、CPP、CPE、PVC、PE、铝箔、纸张等各种卷状材料的分条、在生产过程中根据不同需要对材料进行切边、分切等

USE

This machine is suitable for slitting and rewinding roll materials such as BOPP, PET, CPP, CPE, PVC, aluminum foil and paper, etc. It can cut edge, separate and cut material according to different requirements during production.

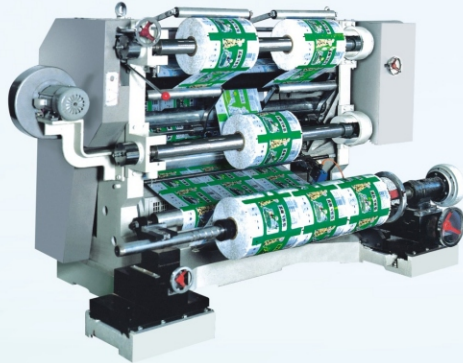

性能及特点:

1. 本机属立式分条机。
2. 独立总控制屏，操作更灵活、方便。
3. 放卷自动纠偏，光电眼适用于跟踪透明材料边缘及颜色。
4. 放卷张力采用磁粉制动器控制。
5. 收卷采用磁粉离合器控制。
6. 设有边料风送或卷取装置（订货时选择）。
7. 走料长度自动计米。
8. 收卷压辊使卷材更平整。
9. 双气胀收卷轴。


Performance and Features:

1. This machine is a kind of vertical slitting & rewinding machine
2. Independent master control panel, more flexible and even easier operation.
3. Automatic EPC for unwinding, photocell is suitable for tracking the edge and color of transparent material.
4. Equipped with magnetic powder brake for unwinding tension control
5. Magnetic clutch control for rewinding tension control
6. It can be equipped with rim charge conveying or rewinding device (which can be selected on order).
7. Automatic meter counting device



Lfq-B型 系列立式自动分条机

Lfq-B Series Vertical Automatic Slitting & Rewinding Machine

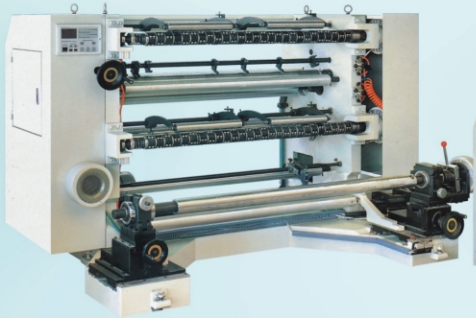

Lfq-A, B Series Vertical Automatic Slitting & Rewinding Machine

主要技术参数 Main Technical Variables:

机型	Type	Lfq-700A(B)	Lfq-1100A(B)	Lfq-1300A(B)
分切卷材最大宽度	Max. Width of Mother Roll	700mm	1100mm	1300mm
分切卷材最大直径	Max. Diameter of Mother Roll	φ600mm	φ600mm	φ600mm
分切卷材宽度	Width of Final Roll	30~600mm	30~1000mm	30~1200mm
分切速度	Slitting and Rewinding Speed	5~160m/min	5~160m/min	5~180m/min
纠偏误差	Tolerance of EPC	<±0.5mm	<±0.5mm	<±0.5mm
总功率	Total Power	2.7Kw	3.5Kw	3.5Kw
整机重量	Weight of Machine	1200kg	1500 kg	1800 kg
外形尺寸	Overall Dimension	2000×1110×1400mm	2400×1110×1400mm	2600×1110×1400mm

外观和数据如有变化，恕不另行通知 Technical Parameters are subject to change without prior notice

Gfq-1300B型 全自动高速分切机

Gfq-1300B High Speed Slitting & Rewinding Machine



用途:

该机适用于BOPP、PET、PVC、PE、铝箔、纸张等各种卷状材料的分条、在生产过程中根据不同需要对材料进行切边、分切等。

USE

The slitting and rewinding machine suitable for BOPP, PET, PVC, PE, aluminum foil and paper material etc.

It integrates advanced mechanical, electric, optical and pneumatic technology and components.

This machine has been proved to be of high performance such as high speed, high stability, easy operation and high slitting neatness. It is a kind of ideal machine for slitting.



主要技术参数 Main Technical Variables:

机型	Type	Gfq-1300B
分切材料厚度	Thickness of Material	0.012~0.15mm
机器运行速度	Mechanical speed	380m/min
放卷直径	Unwinding Diameter	3' & 6' /700mm
放卷宽度	Max. Unwinding Width	1300mm
分切宽度	Width of final roll	50~1300mm
收卷直径	Rewinding diameter	3' φ/148mm
纠偏方式	Deviation-rectifying method	Photocell tracking
张力控制方式	Automatic Tension Control Method	Tension Control
总功率	Total Power	18Kw
机器重量	Weight of Machine	3.6T
机器尺寸	Overall Dimension	3050×1950×1650mm



WFQ700-1300型系列卧式电脑分条机

WFQ700-1300 Series Horizontal Type Computer Slitting & rewinding Machine

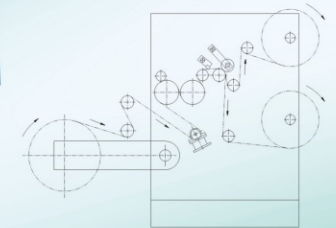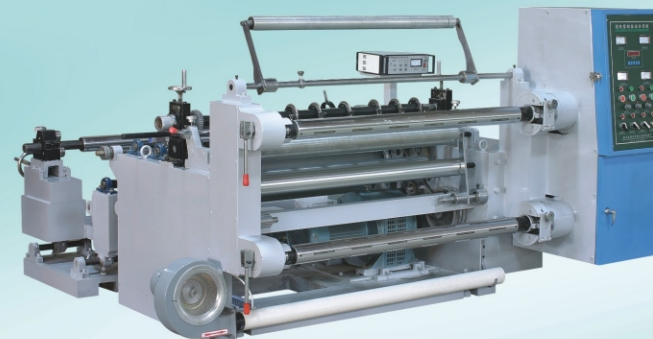

穿膜图 General Chart

Model WFQ Series Horizontal Type Computer Slitting & rewinding Machine

主要技术参数 Main Technical Variables:

机型	Type	WFQ-700	WFQ-1100	WFQ-1300
卷材最大宽度	Max. Width of Mother	600mm	1000mm	1200mm
卷材最大直径	Max. Diameter of Mother Roll	φ600mm	φ600mm	φ600mm
卷材成品宽度	Width of Final Roll	30~600mm	30~1000mm	30~1200mm
分切速度	Slitting and Rewinding Speed	5~180m/min	5~180m/min	5~180m/min
电机功率	Motor Power	2.7Kw	3 Kw	3.5Kw
整机重量	Weight of Machine	1800kg	2000 kg	2200 kg
外形尺寸	Overall Dimension	2100×1800×1200mm	2100×2000×1200mm	2200×2100×1200mm

外观和数据如有变化，恕不另行通知 Technical Parameters are subject to change without prior notice