

RLD-800、1300 系列穿带连卷制袋机


RLD-800、1300 Series Ribbon-through Continuous-rolled Bag Making Machine

性能及特点:

1. 该机由本公司采用国内外先进技术设计制造(国内首创)。
2. 采用电脑控制, 伺服电机结构机型。
3. 具有光电自动跟踪, 有白袋、色袋转换功能, 微电脑定长、自动计数、到数报警、自动控温。
4. 具有自动割口、打气孔、半圆孔、穿带子、带子移位、边封、底封、点断、对折、连卷与分卷等机械装置。
5. 该机可加工连卷穿带垃圾袋, 连卷平口袋与平口袋功能。

Performance and Features:

1. The machine is designed and produced by our company based on the latest technology in the world (first original producer in local market)
2. The machine adopts computer control system, servo motor structure.
3. With functions such as photocell automatic tracking, blank/ color bag-making shift, microcomputer length setting, automatic counting, automatic alarm when reaching the set figure, automatic temperature control.
4. Equipped with mechanical device for functions such as auto cutting, punch hole, half-round hole, strip-go-through, strip moving, side sealing, bottom sealing, point-cutting, folding, continuous rolled and roll separate etc.
5. This machine can produce continuous-rolled strip-through type garbage bag, continuous-roll flat bag and normal flat bag.

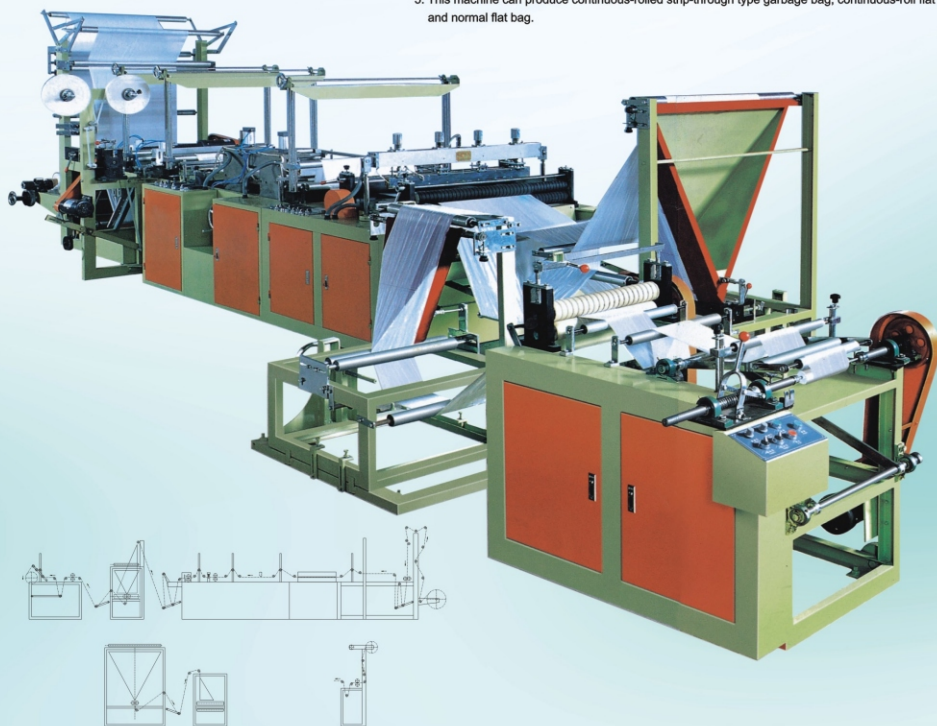

RLD-800、1300 Series Ribbon-through Continuous-rolled Bag Making Machine

主要技术参数 Main Technical Variables:

机型	Type	RLD-800	RLD-1300
制袋最大宽度	Max. Bag-making Width	800mm	1300mm
制袋最大长度	Max. Bag-making Length	999mm	999mm
薄膜厚度	Thickness of Film	0.01-0.05mm	0.01-0.05mm
制袋速度	Capacity	15~35pcs/min	15~35pcs/min
总功率	Total Power	5Kw	10Kw
机器重量	Weight of Machine	2200kg	3200kg
外形尺寸	Overall Dimension	8200×2600×2200mm	9200×3100×2200mm

外观和数据如有变化, 恕不另行通知 Technical Parameters are subject to change without prior notice!



DFHQ-350×2/450×2 全自动高速制袋机

DFHQ-350×2/450×2 Full Automatic High Speed T-shirt Bag Making Machine




特点:


本机以HDPE、LDPE筒膜为原料可生产印刷、本色、背心袋, 采用PLC控制、双伺服(步进)马达定长、液晶触摸屏实时显示, 从送料、封底、切断、冲口、输送一次性完成, 自动化程度高, 经济效益好。

Characteristics

This machine is applied to manufacturing and printing the uncolored vest bags made of HDPE, LDPE roll film. It adopts PLC control, double servo (step) motor fixed length and the liquid crystal touch screen actual display to finish the feeding, sealing, cutting, punching holes and transporting only in one process. It is of high degree of automation and good economic result.

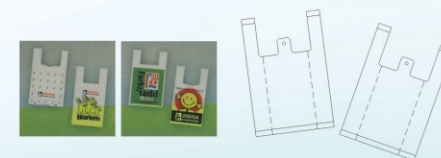

Sealing Knife × 2



Photocell × 2



Driver × 2



Waste Delivery



Cylinder × 2

DFHQ-350×2/450×2 Full Automatic High Speed T-shirt Bag Making Machine

主要技术参数 Main Technical Variables:

型号	Model	DFHQ-350 × 2	DFHQ-450 × 2
最大制袋宽度	Max. Bag-making width	300mm × 2	400mm × 2
最大制袋长度	Max. Bag-making length	650mm	650mm
制袋厚度	Bag-making thickness	0.015~0.035mm	0.015~0.035mm
制袋速度	Bag-making speed	140~200 pcs/min × 2	140~200 pcs/min × 2
空气压力	Air pressure	5kg/cm ²	5kg/cm ²
总功率	Total power	7kw	9kw
机器重量	Weight of machine	1400kg	1600kg
外形尺寸	Overall dimension	6000 × 1400 × 1600mm(L × W × H)	6000 × 1600 × 1600mm(L × W × H)

外观和数据如有变化, 恕不另行通知 Technical Parameters are subject to change without prior notice!

GB-850 双层四道全自动制袋机

GB-850 Automatic Double-layer Four-lines Bag Making Machine



主要技术参数 Main Technical Variables:

型号	Model	GB850
袋宽(单色)	Bag width(natural color)	100-350mm
袋宽(彩色)	Bag width(printed color)	100-800mm
最大袋长	Bag length	1200mm
生产速度	Production speed	120pcs/minX4
薄膜厚度	Thickness of film	0.01-0.10mm
功率	Power	5KW
整机重量	Gross weight	1300kg
外形尺寸	Machine dimension(LxWxH)	6000X1350X2000mm

外观和数据如有变化,恕不另行通知 Technical Parameters are subject to change without prior notice!

GB-800ZD全自动塑胶手提袋制袋机(一机四用)

GB-800ZD Fully Automatic Plastic Hand Bag Making Machine(One Machine Four Functions)

用途:该机具有四种功能(软式手提袋、派奇贴片袋、穿绳波丽袋、顶折冲孔袋)此机器是结合机、光、电、气一体化的新产品。超级的技术,高科技的研发,重大的塑胶产业贡献。(国内唯一)

Application: This machine has four functions (soft hand bag, Patch bag, rope bag, prefolded punching bag). It is coupled with machinery, light, electronic, pneumatic integration. Super technology and high-science development contribute to plastic industry a lot. (Only one in domestic)

性能特点:

1. 适用于生产侧封型高低压塑胶手提袋(BOPP亦适用)。
2. 独家设计之液晶大屏幕, 特殊伺服马达送料, PLC集中控制系统。
3. 软手挽及贴片从整卷到烫合调整全自动完成, 手挽承受力高(专利)。
4. 印刷电眼结合高科技的电脑控制, 容易操作的发明设计。
5. 特殊花纹的预热刀, 双面加热, 熔合力强, 袋子不变形, 容易调整的设计。
6. 采用最优的封刀品质, 高温加热不变形, 人性化的结构加速设计, 快速翻转, 清洁简单。
7. 加热式冲孔设计, 容易切断, 废料自动脱落, (专利)。
8. 可选购单张膜对折架设备。
9. 可选购塑料硬手把装置。

Performance and Characteristics:



1. Suitable for side-seal high & low pressure plastic hand bag (BOPP).
2. Exclusive design of large liquid-crystal screen, special servo motor for feeding, PLC integrated control system.
3. Fully-automatic high-speed achievement from roll to hot-melting for soft hand ropes and stick pieces, strong support force (patent).
4. Invention and design of printing magic eye, high-tech computer control and easy operation.
5. Design of pre-heated knife with special lines, heating on both sides, strong fusion, invariable bag shape and easy adjustment.
6. The best seal knife is adopted, invariable after high-temperature heat, reasonable structure design, fast turn-over, clean and simple.
7. Design if thermal punching, easy-cut, automatic waste fall-off (patent).
8. Folding equipment for sheet film is optional.
9. Plastic hard handle devices.

主要技术参数 Main Technical Variables:


机型	Model	GB-800ZD
制袋长度	Length of bag-making	250-750mm
制袋宽度	Width of bag-making	250-800mm
顶折边	Pre-folded edge	50-75mm
底插边	Bottom-inserted edge	20-70mm
薄膜厚度	Thickness of film	0.04-0.1mm
制袋速度	Speed of bag-making	Soft hand bag 60 bags/min
		Patch bag 60bags/min

机型	Model	GB-800ZD
制袋速度	Speed of bag-making	Rope bag 70bags/min
		顶折冲孔袋 Pre-folded punching bag 75bags/min
总功率	Total power	11kw
机器尺寸	Machine dimension	8200x3100x1870mm
机器重量	Machine weight	3500kg
空气压缩	Air compressor not	7HP

外观和数据如有变化,恕不另行通知 Technical Parameters are subject to change without prior notice!

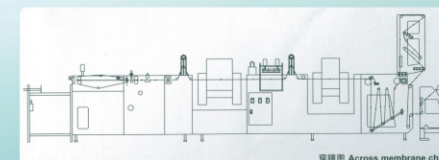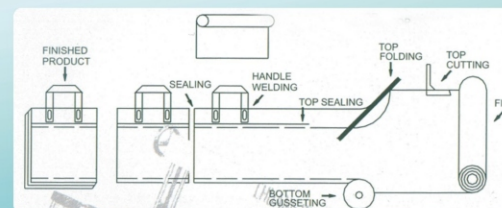


穿膜图 Across membrane chart

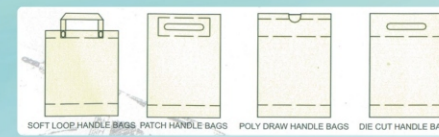

SOFT LOOP HANDLE BAGS PATCH HANDLE BAGS POLY DRAW HANDLE BAGS DIE CUT HANDLE BAGS

DZB500-800 电脑控制高速连卷背心袋制袋机(双道)

DZB500-800 Computer Control High-speed Rolling Bag making Machine(Double layer)



特点:

本机特别设计为点断连卷平口袋及点断连卷背心袋双用机。利用电脑控制, 步进(伺服)定长系统使封切尺寸误差小。装置电眼追踪使印刷袋之图案位置精确。可选择电脑数控调整袋子长度, 印刷袋一有问题本机自动停机并报警。

用途:


本机生产的高、低密度聚乙烯膜袋, 适用于超市购物、商场购物。

Features:

This machine a specially-designed point-cut rolling for vest & flat bags, is controlled by a computer, the step(servo) setting length system can reduce the sealing-cutting dimensions errors, and the photocell help make the position of figure of printing bags accurately, the computer numerical control can be selected to adjust the length of bag the machine will automatically stop and sound a warning if there is something wrong with the printing bags.

Use:

The high and low density polyethylene film bags produced by the machine, which are applied to bag of the supermarkets, shops and markets.

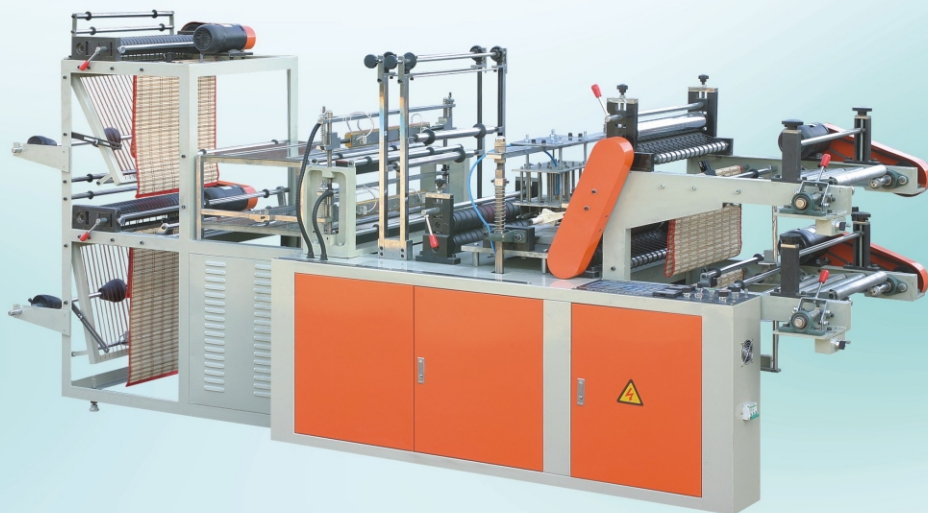

DZB500-800 Computer Control High-speed Rolling Bag making Machine(Double layer)

主要技术参数 Main Technical Variables:

型号	Model	DZB-500	DZB-600	DZB-800
制袋最大宽度	Max. Width of bag-making(mm)	400	500	700
制袋最大长度	Max. Length of bag-making(mm)	1200	1200	1200
制袋厚度	Bag-making Thickness	0.008-0.15	0.008-0.15	0.008-0.10
制袋速度	Speed of bag-making(pc/min)	40-120	40-120	40-120
电机功率	Power of motor(kw)	1.1	1.1	1.5
电热功率	Electric Heating power	1.2	1.6	2.2
装箱尺寸	Packing Dimensions(L×W×H) mm	3600×1200×1700	3400×1300×1700	3600×1500×1700
机器重量	Machinery weight (kg)	800	900	1000

外观和数据如有变化, 恕不另行通知 Technical Parameters are subject to change without prior notice!



SHXJ-D1000/1500 电脑六道高速制袋机

SHXJ-D1000/1500 Six Lines High Speed Bag Making Machine(Computer Control)



1. 电脑自动控制。
2. 从卷膜到成品袋, 是一次性完成。
3. 伺服马达定长, 控制制袋速度。
4. 自动喂料, 力矩电机自动控制张力。
5. 当系统出现喂料和袋子阻塞时, 电脑将自动停止操作。
6. 高效率的运行, 节省人力和时间。
7. 采用热封冷切装置。

- Computer control over the entire process.
- From film roll to final bag, one process flow.
- Servo motor, makes it easy to adjust the bag length and the production speed.
- Automatic film feeding, coordination free from tension adjustment.
- Automatically stop when film feeding blocks or bags jam.
- High production efficiency to save manpower and time.
- Equipped with heat sealing and cold cutting device.

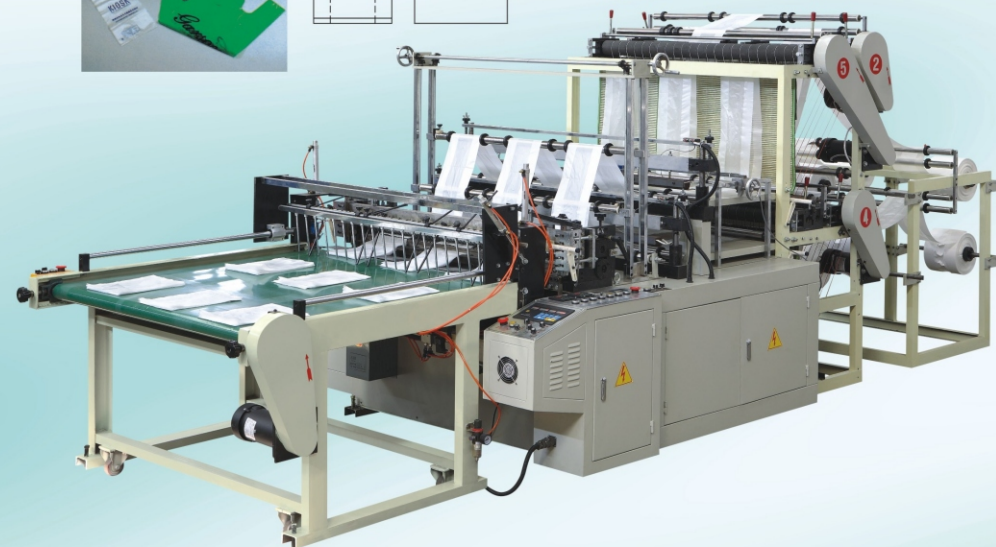

主要技术参数 Main Technical Variables:

型号	Model	1000	1200	1500
封切宽度	Width of sealing & cutting(mm)	980	1180	1480
封切长度	Length of sealing & cutting(mm)	2000	2000	2000
制袋速度	Speed of bag-making(pc/min)	40-100x6	40-100x6	40-100x6
条数	Number of strip(pc)	6	6	6
电机功率	Power of motor(kw)	2.2	3	4
机总重	Weight(kg)	1.3	1.3	1.6
外形尺寸	Outline dimension(LxWxH)mm	4800x2200x1800	4800x2200x2000	4800x2200x2600

外观和数据如有变化, 恕不另行通知 Technical Parameters are subject to change without prior notice!

DFR-500、600、700 电脑热封热切制袋机 (双道)

DFR-500、600、700 Computer Heat-sealing & Heat-cutting Bag-making Machine (double lines)

特点:

制有印刷的背心袋、平口袋; 主电机采用变频电机, 使您更省电, 调速更稳定。良好性能的色标跟踪仪, 使封切长度更准确, 误差更小。采用先进的电脑, 长度调整方便, 精确。

Feature:

It is used for producing vest bags and flat-opening bags with printing. The main motor adopts inverter to save more electricity and regulate speed more freely. The color code tracker with good performance makes the sealing and cutting length more accurate and the lower error. It adopts advanced computer to adjust length more freely and accurately.


主要技术参数 Main Technical Variables:

型号	Model	500	600	700
制袋宽度	Width of bag-making(mm)	30-450	30-550	30-650
制袋长度	Length of bag making(mm)	10-999	10-999	10-999
制袋速度	Speed of bag-making(pc/min)	150	150	150×2
主机功率	Power of motor(kw)	1.1	1.1	1.5
电热功率	Power of electric-thermal(kw)	1.6	1.6	2
机重	Weight(kg)	700	800	1000
外形尺寸	Outline dimension(L×W×H) mm	2000×1200×1500	2000×1300×1600	2000×1450×1700



DFR-350×2、450×2 电脑热封热切制袋机(双道)


DFR-350×2、450×2 Computer Heat-sealing & Heat-cutting Bag-making Machine(Double photocell)

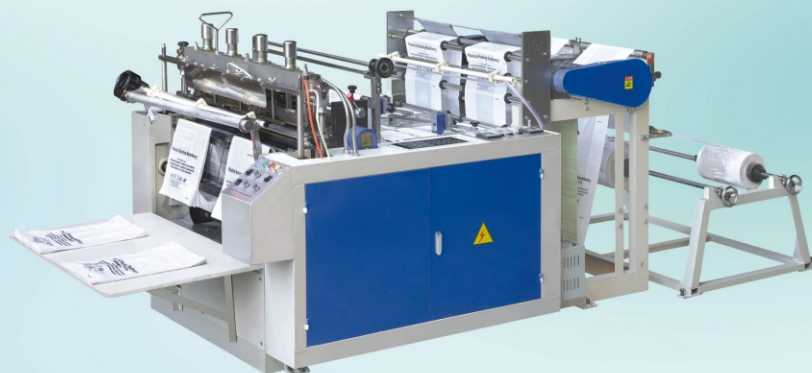

DFR-350×2、450×2 Computer Heat-sealing & Heat-cutting Bag-making Machine(Double photocell)

主要技术参数 Main Technical Variables:

型号	Model	350×2	450×2
制袋宽度	Width of bag-making(mm)	30-300	30-400
制袋长度	Length of bag making(mm)	10-999	10-999
制袋速度	Speed of bag-making(pc/min)	170×2	170×2
主机功率	Power of motor(kw)	2	2
电热功率	Power of electric-thermal(kw)	3	4
机重	Weight(kg)	1000	1200
外形尺寸	Outline dimension(L×W×H) mm	3000×1400×1600	3000×1500×1600



Double photocell

外观和数据如有变化, 恕不另行通知 Technical Parameters are subject to change without prior notice!


SHXJ-A600-1000 电脑双层高速制袋机

SHXJ-A600-1000 High-speed Double Lines Bag-making Machine(With Computer Control)



SHXJ-B600-1000 电脑双层高速制袋机

SHXJ-B600-1000 High-speed Double Lines Bag-making Machine(With Computer Control)



Belt Conveyor



SHXJ-A(B)600-1000 High-speed Automatic Bag-making Machine

主要技术参数 Main Technical Variables:


型号	Model	A(B)600	A(B)700	A(B)800	A(B)900	A(B)1000
封切宽度	Width of sealing & cutting(mm)	580	680	780	880	980
封切长度	Length of sealing & cutting(mm)	700	1200	1200	1400	1600
制袋速度	Speed of bag-making & cutting(mm)	(60-120)×4	(60-120)×4	(60-120)×4	(60-120)×4	(60-120)×4
条数	Number of strip(pc)	4	4	4	4	4
电机功率	Power of motor(kw)	1.1	1.5	1.5	2.2	3
机总重	Weight(kg)	900	1000	1100	1200	1300
外形尺寸	Outline dimension(L×W×H) mm	3200×1200×1700	3500×1300×1850	3600×1500×1950	3700×1600×2000	3800×1800×2100

外观和数据如有变化, 恕不另行通知 Technical Parameters are subject to change without prior notice!

HYGL-II 异形袋制袋机 (鲜花袋制袋机)

HYGL-II Special-shape Bag-making Machine
(Bag-making Machine For Fresh Flower Bags)

本机适用于BOPP, PP, PE等材料的热封切鲜花袋。本机采用微电脑定长, 光电跟踪, 限位停机, 自动记数, 自动纠偏, 到数报警, 双后送料, 袋口点断, 多位打孔, (可加旁封刀)。
The machine is suitable for making hot sealing-cutting fresh flower bags with BOPP, PP, PE, ect. The machine adopts microcomputer in fixing length, photoelectric device in tracing, limit stopping machine, automatic counter, automatic rectifier, number alarm and double back feeder, bag-neck cutter by inch and multi-position holing unit(it can be equipped with an additional side-sealing blade).

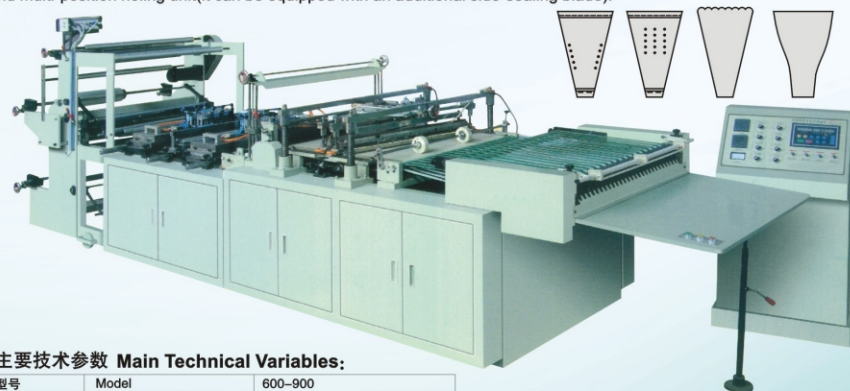

主要技术参数 Main Technical Variables:

型号	Model	600-900
最大制袋长度	Max. Bag-making Length	520mm
最快制袋速度	Max. Bag-making Speed	35-95pcs/mm
最快制袋角度	Max. Bag-making Angle	50
用电功率	Power	380v 6kw
整机重量	Weight	1000kg
外形尺寸	Overall Dimension	4600X1150X1700mm

SHXJ-C 系列全自动背心袋制袋机(四道)

SHXJ-C Series Full Automatic T-shirt Bag making Machine(4 lines)



主要技术参数 Main Technical Variables:

型号	Model	600	700	800
封切宽度	Width of sealing & cutting(mm)	580	680	780
封切长度	Length of sealing & cutting(mm)	1200	1200	1200
制袋速度	Speed of bag-making(pc/min)	400	400	400
条数	Number of strip(pc)	4	4	4
电机功率	Power of motor(kw)	2.2	3	3
机总重	Weight(kg)	1200	1400	1600
外形尺寸	Outline dimension(L×W×H) mm	6000×1200×1700	6000×1300×1850	3600×1500×1950

外观和数据如有变化, 恕不另行通知 Technical Parameters are subject to change without prior notice!


手提袋软手把烫合机

Soft Handle Sealing Machine



主要技术参数 Main Technical Variables:

袋宽	Bag Width	250-600mm
袋长	Bag Length	Max.700mm
袋厚	Bag Thickness	0.05-0.2mm
电源	Power	AC220V
速度	Speed	25pcs/min
机械尺寸	Machine Dimensions(L×W×H)	1.3×1.3×1.3m

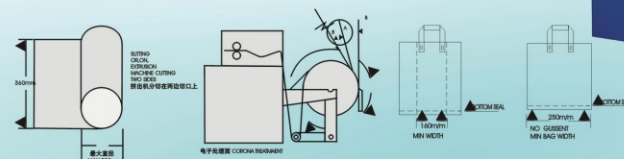

RQL600-1000型 电脑热切制袋机

RQL600-1000 Computer Heat-Cutting Bag-Making Machine

特点:

本机适用于BOPP, OPP热收缩膜等材料的热合热封切, 是制作袜子袋、毛巾袋、面包袋、饰品袋的理想设备, 本机背有电脑定长、光电跟踪, 性能稳定(铸铁结构), 速度快等特点。具备自动上胶、自动打孔、热花边等功能。

Feature:

This machine is suitable for heat-sealing and heat-cutting such materials as BOPP, OPP thermal contracting films, etc. And it is a king of ideal equipment for making socks bag, towel bag, bread bag and ornament bag, etc. The machine has such characteristics as length fixing by computer, photoelectric tracking stable performance(cast-iron structure) and highspeed, etc. And has such functions as automatic gluing, automatic punching and lace heat-sealing, etc.



RQL600-1000 Computer Heat-cutting Bag-making Machine

主要技术参数 Main Technical Variables:

型号	Model	600	800	1000
封切长度	Width of sealing & cutting	999mm	999mm	999mm
封切宽度	Length of sealing & cutting	580mm	780mm	980mm
制袋速度	Speed of bag-making	40-240pc/min	40-240pc/min	40-240pc/min
总功率	Power of motor	3kw	7kw	10kw
机器总重	Weight	700kg	850kg	950kg
外形尺寸	Outline dimension(L×W×H)	3600×1200×1700mm	3600×1400×1700mm	3600×1600×1700mm

外观和数据如有变化, 恕不另行通知 Technical Parameters are subject to change without prior notice!